


H05Z-K H07Z-K

Flexible single core rubber insulated electric cables, with low emission of fumes and corrosive gases, sheathless, for general use.



Packing

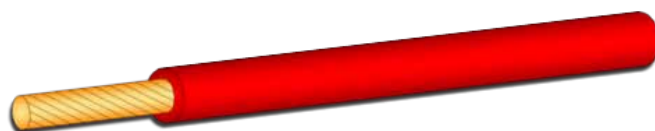

Wire description

H05V2V2-F / H05V2V2H2-F „size mm²“ PMB

Construction

Wire core:	Flexible copper class 5 CEI EN 60228
Insulation:	Rubber type EI5 LSOH
Min. bending radius:	Fixed installation: 4 x outer diameter

Standards and approvals



Charakteristics

Operating temperature:	+ 5°C to + 90°C on the conductor
Max. temperature of short circuit	250°C on the conductor (max duration 5 seconds)
Rated voltage:	H05Z-K: 300 / 500 V H07Z-K: 450 / 750 V

Wire description	Nominal size	Insulation thickness	Outer diameter
	mm ²	mm	mm
H05Z-K	1 x 0,5	0,60	2,10
	1 x 0,75	0,60	2,30
H07Z-K	1 x 1	0,60	2,50
	1 x 1,5	0,70	2,90
	1 x 2,5	0,80	3,60
	1 x 4	0,80	4,10
	1 x 6	0,80	4,70
	1 x 10	1,00	6,00
	1 x 16	1,00	6,90
	1 x 25	1,20	8,50
	1 x 35	1,20	9,70
	1 x 50	1,40	11,60
1 x 70	1,40	13,50	
1 x 95	1,60	15,30	
1 x 120	1,60	17,00	
1 x 150	1,80	18,90	
1 x 185	2,00	20,90	
1 x 240	2,20	23,80	